

INDUSTRIAL VEHICLES INTERNATIONAL, INC.

minivib

A Broad Band 10 to 550 hz. Vibrator

minibuggy


An Environmental Low Impact Vehicle System

The 'minibuggy' off-road carrier with the 'minivib' vibrator is an advanced seismic source production system designed for high resolution and high production geophysical prospecting. The 6,000 pound output 'minivib' offers a 10 to 550 Hz output making it the broadest band source available in its class. The advanced system features include high fidelity and broad band width, low source generated ground pressure, low vehicle generated ground pressure, sound limiting systems, and ergonomic operator features. Wagen wheel articulated steering, which was first introduced to the geophysical industry by IVI in 1984, offers safe and reliable off road operation. This system is an excellent choice for environmentally sensitive, high resolution surveys.



Side View Dimensional Drawing of the 'minivib' mounted on the 'minibuggy'

meters

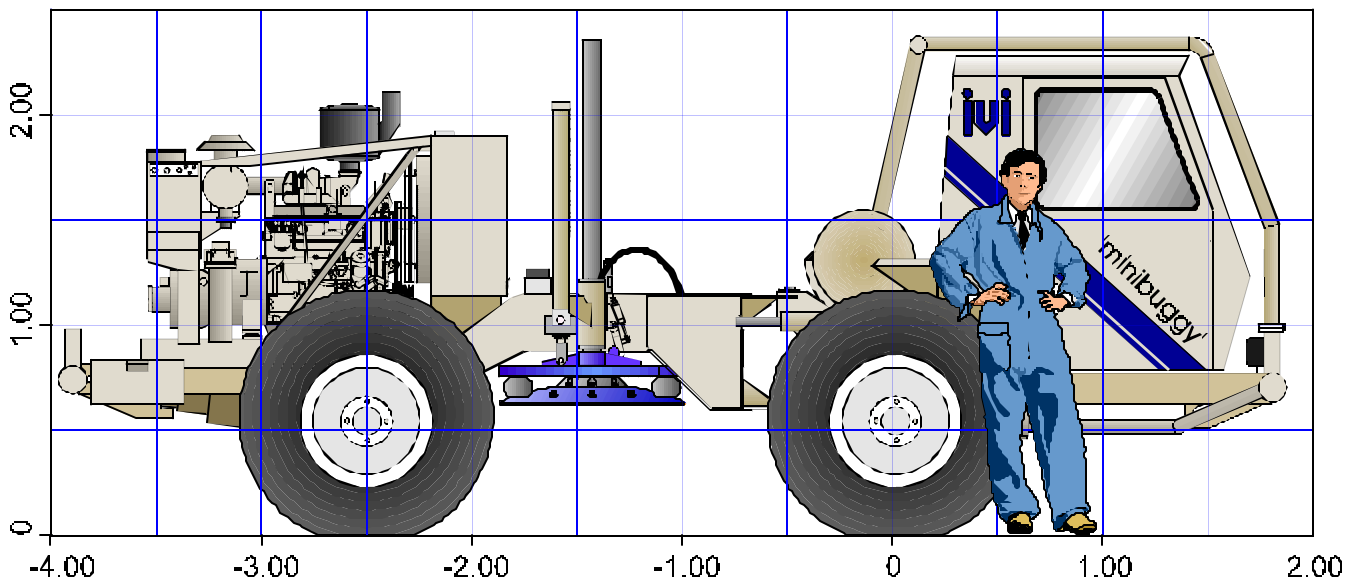

VISIT THE IVI WEBSITE AT <http://www.indvehicles.com>**'minibuggy' Vehicle**

CATEGORY	ENGLISH	METRIC
Total Weight	11,450 Pounds	5.194 kgf.
Front Axle Weight	5,560 Pounds	2.522 kgf.
Rear Axle Weight	5,890 Pounds	2.672 kgf.
Traction System Pressure	3,500 PSI	207 bar
Transmission	Hydrostatic 3 Speed	Hydrostatic 3 Speed
Cab	2 Man Vista Cab	2 Man Vista Cab
Turning Radius	169 Inches	4,29 meters
Diesel Engine - John Deere	103 Horsepower @ 2500 RPM	77 kW @ 2500 RPM
Axles	Inboard Planetary	Inboard Planetary
Brakes	Enclosed Wet Disc	Enclosed Wet Disc


'minivib' Vibrator

CATEGORY	ENGLISH	METRIC
Max Theoretical Peak Force	6,000 Pounds	26.689 N.
Mass Piston Area	1.50 Inches ²	9,7 cm ²
Reaction Mass Weight	311 Pounds	141 kgf.
Reaction Mass Stroke	1.88 Inches	4,78 cm.
Servo Valve	5 GPM	18,9 l/m
Servo Valve Pilot Filter	3 Micron	3 Micron
Baseplate Area	1,018 Inches ²	6.567 cm ²
Baseplate Assembly Weight	370 Pounds	168 kgf.
Lift System Stroke	38 Inches	96,5 cm.
Lift Cylinder Diameter	2.5 Inches	6,3 cm.
Lift Synchronization	Mechanical Crossbeam	Mechanical Crossbeam
Vibrator Pump Flow	15 GPM	56,7 l/m
Holddown Weight	10,000 Pounds	4.537 kgf.

OPTIONS

OPTION	DESCRIPTION
Front Winch	Hydraulically powered 8,000 pound winch
Noise Reduction Panels	Reduces the ambient noise of the 'minibuggy' from 82 dba to 79 dba, 7 meters from the side of the vehicle at full engine RPM
Cold Weather Options	Various heaters, covers, and other equipment for cold temperatures
Optional Lighting	Various vehicle lighting configurations for different local requirements
Cab Protective Structure	A cab structure designed to protect the cab in rugged conditions
Flotation Tire	Super Terra Grip 48x31-20 --10 psi ground pressure with no penetration

Specifications are subject to change without notice. All specifications reflect standard equipment.

**INDUSTRIAL VEHICLES INTERNATIONAL, INC.**6737 EAST 12TH STREET, TULSA, OKLAHOMA 74112 U.S.A. PHONE (918) 836-6516 FAX (918) 838-9529
E-MAIL ivi@indvehicles.com